

Utility High Pressure Pumps

Light and effective double acting high pressure air operated pumps designed for use in small mobile and portable greasing

Pumps are available with three different suction tube lengths: 35 lb, 120 lb and 400 lb. They include a height adjustable 2" NPT(M) bung adaptor.

Reliable air motor

Well proven air motor with 3" effective piston diameter air motor, minimum air consumption

Double acting pump

Provides even and smooth fluid flow

Long life packings

Low friction, dual packing step-seals provides longer trouble-free operation

High quality materials


Barrel, piston and foot valve are made of hardened, precision fitted ground steel for perfect seal and long life

MARKETS SERVED

- Agriculture
- Service shops
- Light industrial

FLUIDS HANDLED

Grease up to NLGI-2

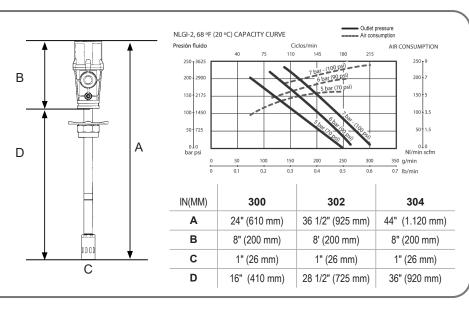



Pump ratio	55:1	
Air pressure operating range	40 to 140 psi (3 to 10 bar)	
Air consumption ⁽¹⁾	5.8 scfm (165 NL/min)	
Maximum fluid outlet pressure	7,700 psi (550 bar)	
Air motor diameter	3" (70 mm)	
Air motor stroke	1 1/2" (35 mm)	
Delivery at 110 cpm	0.7 lb/min (300 g/min)	
Maximum free flow delivery(2)	1.3 lb/min (600 g/min)	
Air inlet	1/4" NPT(F)	
Fluid outlet	1/4" NPT(F)	
Wetted materials	Steel / Buna-N / PTFE / Zinc	
Noise level	Pump noise level meets OSHA requirements at all recommended operating air pressures	
Manual	840 803	

- (1) Maximum air consumption with 90 psi (6 bar) air inlet pressure, NLGI-2 grease at 68 °F (20 °C) and 110 cpm.
- (2) Maximum free delivery at 100 psi (7 bar) NLGI-2 grease.

ORDER INFORMATION

300	PM3 55:1 35 lb pail with bung adaptor	
302	PM3 55:1 120 lb keg with bung adaptor	
304	PM3 55:1 400 lb drum with bung adaptor	

Drum Covers



1934	Heavy-duty 35 lb Pail cover

0	

1936	Heavy-duty 120 lb Keg cover



Follower Plates





35 lb Follower plate

962

966 400 lb Follower plate