GREASE PUMPS: PUMPMASTER 45 – 25:1







Heavy-Duty Pressure Transfer Pump

Medium pressure, high delivery, double acting, heavy-duty pump for medium viscosity lubricants transfer. Recommended to use with low consistency grease in centralized grease systems that do not require a high pressure outlet, and in large distribution systems of high viscosity oils.

41/2" air motor

Mechanically actuated air valve with only three moving parts and no springs. Large effective area for maximum pumping power

Efficient air exhaust

No ice forming, no stalling pump operation

Long life packings

Anti-corrosion, hardened plunger and cartridge packings assembly designed for low friction.

High quality materials

Low friction polyurethane seals, hard chromed steel fluid plunger and steel valves for fewer repairs

Ductile iron pump body

For superior properties

Two ball valve pump

Larger port for priming and pumping large volumes of medium viscosity fluids.

TECHNICAL SPECIFICATIONS


Pump ratio	2
Air pressure operating range	2
Air consumption ⁽¹⁾	4
Maximum outlet pressure	5
Air motor effective diameter	4
Air motor stroke	4
Continuous duty flow rate	1
Maximum free flow	3
Air inlet	1
Fluid outlet	1
Wetted materials	С
Noise level	Ρ
	0
Manual	8
(1) Air consumption at 70 psi (5 bar) air pressure, NLGI-0 greas	

ORDER INFORMATION

531 211

PM45 25:1 400 lb drum, flange mounted

Hose Kit High pressure hose connection kit for PumpMaster 45 25:1



Drum Cover



400 lb Heavy-duty drum cover 418 026 PM45/60

MARKETS SERVED


- Lube trucks
- Mining and construction
- · Railroad and mass transit

Α

Industrial

FLUIDS HANDLED

- Grease up to NLGI-2
- High viscosity oils

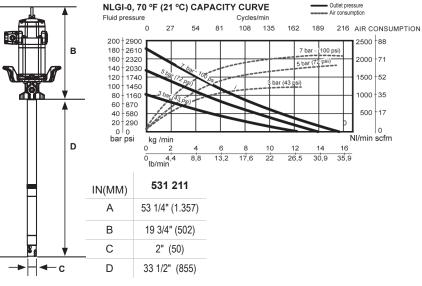

GREASE PUMPS: PUMPMASTER 45 – 25:1

25:1
29 - 200 psi (2 - 14 bar)
47 scfm (1.340 NI/min)
5,000 psi (350 bar)
4 1/2" (115 mm)
4" (100 mm)
13.5 lb/min (6 kg/min)
35.3 lb/min (16 kg/min)
1/2" NPT(F)
1/2" NPT(F)
Cast Iron / Steel / Hard chromed steel / UHMWPE / NBR
Pump noise level meets OSHA requirements at all recommended operating air pressures
853 820
ase at 68 °F (20 °C) and 80 cpm.

