



Roller arm in tank/wall  
mount position



Roller arm in ceiling  
mount position

1400 Series Double Pedestal Arm Hose Reel

Double-pedestal arm steel hose reel can hold up to 40' x 1/4" hose

Fatigue resistant steel spring

For years of durable performance and even load when pulling and recoiling

Full metal double pedestal arm construction

Withstands constant use in heavy duty applications

Epoxy powder coated

For increased wear resistance

Forged brass shaft

Ensures leak-free operation

Hose reels with hose include 30" inlet hose and ball stop

Hose reels offers two mounting positions

May be mounted in ceiling and tank/wall positions


Hose reels are delivered in ceiling mount position

MARKETS SERVED

- Car and truck dealers
- Service shops
- Fleets
- General manufacturing
- Service stations
- Quick lubes

FLUIDS HANDLED

- Air
- Water
- Antifreeze and windshield wash solutions
- Synthetic and mineral oils
- Grease

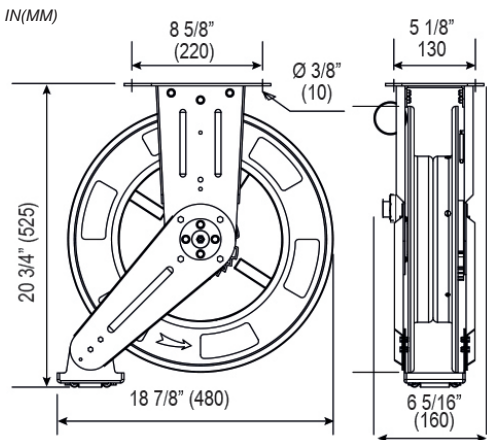

TECHNICAL SPECIFICATIONS

Operating Temperature Range

Air / Water / Antifreeze	-22°F to 194°F (-30°C to 90°C)
Oil	-22°F to 194°F (-30°C to 90°C)
Grease	-22°F to 194°F (-30°C to 90°C)

Wetted Parts

Air / Water / Antifreeze	Brass / steel / Nitrile rubber
Oil	Brass / steel / Nitrile rubber
Grease	Steel / electroless nickel plated steel / nitrile rubber / polyurethane / PTFE


Weight without hose

Manual	33 lb (15 Kg)
	850 804

ORDER INFORMATION

Part No.	Hose Length	Hose I.D.	Outlet thread	Max. Working Pressure	Net Weight	Reel only with swivel Part No.	Delivery Hose	Inlet Hose
<b>LOW PRESSURE AIR/WATER</b> antifreeze and windshield wash solutions brass shaft and acetal swivel - inlet 1/2" NPT(F)								
<b>1413</b>	40'	3/8"	1/4" NPT(M)	300 psi	43 lb	1402	818	822
<b>1417</b>	40'	1/2"	1/2" NPT(M)	300 psi	46 lb	1402	828	822
<b>MEDIUM PRESSURE OILS</b> stainless steel shaft and swivel - inlet 1/2" NPT(F)								
<b>1428</b>	30'	1/2"	1/2" NPT(M)	2,000 psi	45 lb	1402	851	845
<b>1426</b>	40'	1/2"	1/2" NPT(M)	2,000 psi	48 lb	1402	853	845
<b>HIGH PRESSURE GREASE</b> steel shaft and swivel - inlet 3/8" NPT(F)								
<b>1432</b>	40'	1/4"	1/4" NPT(M)	5,000 psi	45 lb	1403	878 000	883
<b>1435</b>	40'	3/8"	1/4" NPT(M)	4,000 psi	48 lb	1403	891 000	883

MOUNTING BRACKET for use with 1400 series hose reels in a bank. Nuts, screws and washers included.

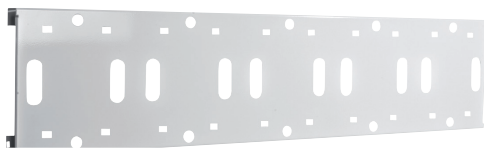

<b>360 114</b>	Holds up to two reels. Dimensions: 21 1/2" x 12"
<b>360 115</b>	Holds up to three reels. Dimensions: 32 1/2" x 12"
<b>360 117</b>	Holds up to five reels. Dimensions: 54 1/2" x 12"
<b>1390</b>	Channel mounting bracket. Channels may be mounted from I-beams with use of channel mounting brackets (up to 9" flange). Order two brackets for the two and three reel channel and three brackets for the five reel channel