

HOSE REELS: 504 SERIES
50' Max hose capacity



HOSE REELS: 504 SERIES
50' Max hose capacity



Roller arm in tank/wall
mount position



Roller arm in ceiling
mount position

504 Series HD Double Pedestal Arm Hose Reel

Full metal, heavy-duty, double pedestal arm hose reels, with hose capacity up to 50' x 1/2" hose

Very tough full metal construction

Able to withstand constant use and abuse in intensive duty applications

Fatigue resistant steel spring

For years of durable performance and even load when pulling and recoiling

Fully ported shaft and swivel, no flow restrictions

Spool mounted on two permanently lubricated and sealed ball bearings

To reduce torque load on spring for smooth retraction and longer life

Large latching area for easier operation

Narrow footprint

Allows mounting more reels in the same area

Hose reels with hose include 30" inlet hose and ball stop

Hose reels offer four mounting positions

To accommodate any reel mounting option; floor, wall, ceiling and tank positions

Hose reels are delivered in ceiling mount position


For reels delivered with arm in side mount position, add the suffix SM to the hose reel part number. i.e. 504 101SM

MARKETS SERVED

- Car and truck dealers
- Service shops
- Fleets
- General manufacturing
- Service stations
- Lube trucks
- Mining and construction
- Railroad and mass transit

FLUIDS HANDLED

- Air
- Water
- Antifreeze & windshield wash solutions
- High pressure hot water
- Synthetic and mineral oils
- Grease

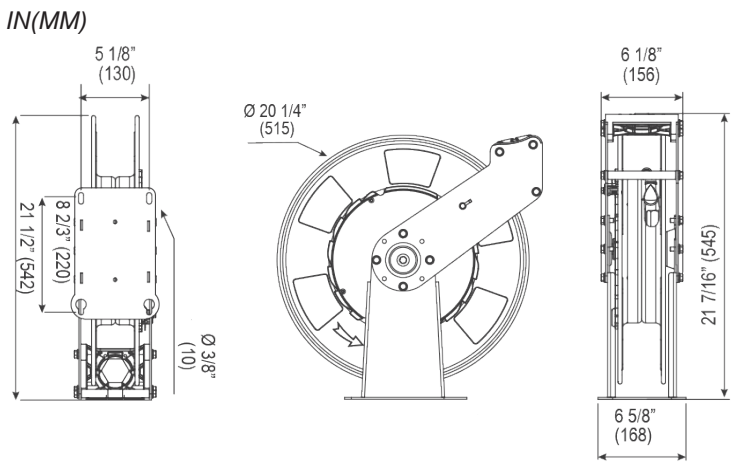

TECHNICAL SPECIFICATIONS

Operating Temperature Range

Air / Water / Antifreeze	-20°F to 140° F (-20°C to 60°C)
Oil	-22°F to 194°F (-30°C to 90°C)
Grease	-22°F to 194°F (-30°C to 90°C)

Wetted Parts

Air / Water / Antifreeze	Brass / acetal / Nitrile rubber
Oil	Steel / electroless nickel plated steel / Nitrile rubber
Grease	Steel / electroless nickel plated steel / Nitrile rubber / PTFE

Weight without hose

57 lb (25.86 Kg)

Manual

850 838

CUSTOM COLORS

Verify lead times for custom colors


Reel Part No. + letter		Color
504 XXX	Reel color, white	RAL 9016
504 xxxK	Reel color, black	RAL 9005
504 xxxL	Reel color, blue	RAL 5005
504 xxxR	Reel color, red	RAL 3011



ORDER INFORMATION

Part No.	Hose Length	Hose I.D.	Outlet thread	Max. Working Pressure	Net weight	Reel only with swivel Part No.	Delivery Hose	Inlet Hose
LOW PRESSURE AIR/WATER antifreeze and windshield wash solutions brass shaft and acetal swivel - inlet 1/2" NPT(F)								
504 151	50'	3/8"	1/4" NPT(M)	300 psi	59 lb	504 159	819	833 853
504 150	50'	1/2"	1/2" NPT(M)	300 psi	63 lb	504 159	833 836	833 853
MEDIUM PRESSURE OILS steel shaft and swivel - inlet 1/2" NPT(F)								
504 250	50'	1/2"	1/2" NPT(M)	2,000 psi	65 lb	504 259	883 843	833 845
HIGH PRESSURE GREASE steel shaft and swivel - inlet 3/8" NPT(F)								
504 350	50'	1/4"	1/4" NPT(M)	5,000 psi	68 lb	504 359	833 849	833 855
504 351	50'	3/8"	1/4" NPT(M)	4,000 psi	68 lb	504 359	833 850	833 855

MOUNTING BRACKET for use with 504 series hose reels in a bank. Nuts, screws and washers included.

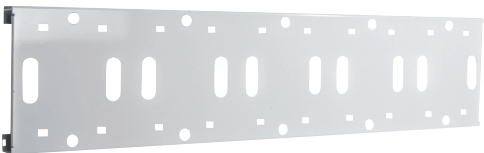

360 114	Holds up to two reels. Dimensions: 21 1/2" x 12"
360 115	Holds up to three reels. Dimensions: 32 1/2" x 12"
360 117	Holds up to five reels. Dimensions: 54 1/2" x 12"
1390	Channel mounting bracket. Channels may be mounted from I-beams with use of channel mounting brackets (up to 9" flange). Order two brackets for the two and three reel channel and three brackets for the five reel channel