



Roller arm in tank/wall
mount position



505 Series HD Double Pedestal Arm Hose Reel

Full metal heavy-duty double pedestal hose reels, with hose capacity up to 65' x 1/2" or 50' x 3/4" hose

Very tough full metal construction

Able to withstand regular use and abuse in intensive duty applications

Fatigue resistant steel spring

For years of durable performance and even load when pulling and recoiling

Fully ported shaft and swivel, no flow restrictions

Spool mounted on two permanently lubricated and sealed ball bearings

To reduce torque load on spring for smooth retraction and longer life

Large latching area

For easier operation

Hose guide arm

Can be placed in four different positions; floor, wall, ceiling and tank positions

Hose reels are delivered in ceiling mount position


Hose reels with hose include hose stop

MARKETS SERVED

- Car and truck dealers
- Service shops
- Fleets
- General manufacturing
- Service stations
- Lube trucks
- Mining and construction
- Railroad and mass transit

FLUIDS HANDLED

- Air
- Water
- Antifreeze solutions
- Synthetic and mineral oils
- DEF
- Used oil evacuation
- Diesel
- Grease

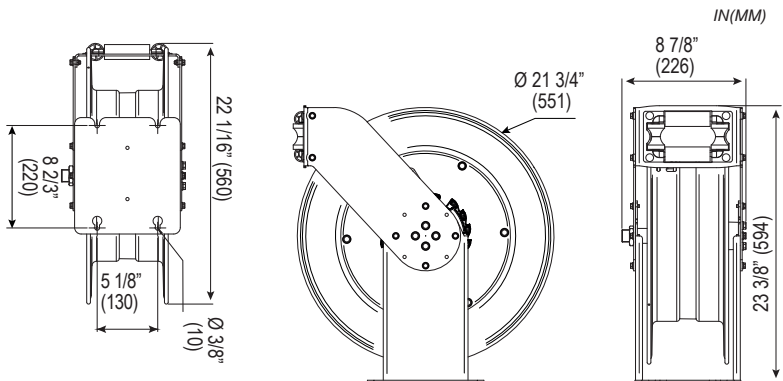

TECHNICAL SPECIFICATIONS

Operating Temperature Range

Air / Water / Antifreeze	-20°F to 140° F (-20°C to 60°C)
Oil	-22°F to 194°F (-30°C to 90°C)
Grease	-22°F to 194°F (-30°C to 90°C)
DEF	-4°F to 140°F (-20°C to 60°C)

Wetted Parts

Air / Water / Antifreeze	Steel / electroless nickel plated steel / Nitrile rubber
Oil	Steel / electroless nickel plated steel / Nitrile rubber
Grease	Steel / electroless nickel plated steel / Polyurethane
DEF	Stainless steel / acetal / Viton

Weight *without hose*

65 lb (29.5 Kg)

Manual

850 825

ORDER INFORMATION

Part No.	Hose Length	Hose I.D.	Outlet Thread	Max. Working Pressure	Net Weight	Reel only with Swivel Part No.	Delivery Hose	Inlet Hose Order Separately
LOW PRESSURE AIR/WATER antifreeze and windshield wash solutions brass shaft and acetal swivel - inlet 3/4" NPT(F)								
505 120	65'	1/2"	1/2" NPT(M)	300 psi	74 lb	505 002	831	857 002
505 121	50'	3/4"	3/4" NPT(M)	300 psi	83 lb	505 002	832 050	857 002
LOW PRESSURE DEF stainless steel shaft and acetal swivel - inlet 3/4" NPT(F)								
505 550	50'	3/4"	3/4" BSPP(M)	300 psi	74 lb	505 502	750 533	750 530
LOW PRESSURE DIESEL steel shaft and swivel - inlet 3/4" NPT(F)								
505 425	50'	3/4"	3/4" NPT(M)	200 psi	84 lb	505 002	863 350	857 001
MEDIUM PRESSURE OILS steel shaft and swivel - inlet 3/4" NPT(F)								
505 220	65'	1/2"	1/2" NPT(M)	2,000 psi	74 lb	505 002	856	860
505 221*	50'	3/4"	3/4" NPT(M)	1,250 psi	74 lb	505 002	859	860
HIGH PRESSURE GREASE steel shaft and swivel - inlet 3/4" NPT(F)								
505 330	65'	3/8"	1/4" NPT(M)	4,000 psi	76 lb	505 014	894	857 003

*Hose reel 505 221 can also be used for used oil evacuation

Hose reels do not include inlet hose. Order separately.

Recommended Accessories for use with 505 series reels



528 002	Bi-conical hose stop and U-bolt kit fits 1/2" hose
528 004	Bi-conical hose stop and U-bolt kit fits 3/8" hose
528 003	Bi-conical hose stop and U-bolt kit fits 3/4" hose