



20V Battery Operated Grease Gun

20 V Li-ION battery grease pump for use with standard grease cartridges or bulk grease. High pressure delivery, up to 700 bar - 10000 psi and up to 160 g/min (dual flow rate, low and high).

Durable handle design

Quality components provide a long and reliable life, overpressure and overload protection.

Optimized Electric Motor

Increases battery life providing more power for greasing through blocked and dirty grease fittings.

LED Work Light

Convenient LED work light, with on/off control.

Bleed Valve and Filler Nipple

Barrel can be filled with bulk grease using a filler pump.

Dual Flow Rate Mode

Low 100 g/min. & High 160 g/min.

Ergonomic Design

Well balanced weight reduces fatigue during long runs. Soft grip for maximum comfort.

2 Ah or 4 Ah Battery Pack

Fast recharge batteries: less than 90 minutes (2 Ah model). 4 Ah battery for extended life.

Rubber Feet

Provides stability on flat surfaces.

44" Hose

With grease coupler for easy access to lube points.



Grease Outlet Hose

Battery Charger

Battery Pack


Carrying Case

MARKETS SERVED

- Truck dealerships
- Fleet service
- Mining and construction
- Lube trucks
- Railroad & mass transit vehicles

FLUIDS HANDLED

- Grease up to NLGI 2

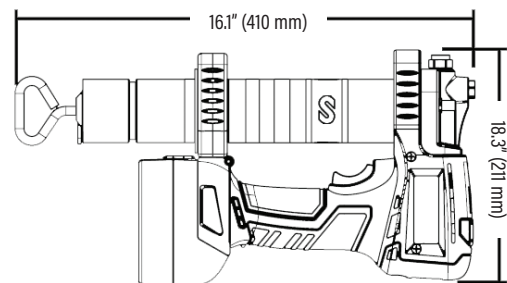

TECHNICAL SPECIFICATIONS

Li-Ion Battery voltage	20 V
Li-Ion Battery capacity	2.0 Ah / 4.0 Ah
90 min battery charger	240 - 220 V / 50 - 60 Hz and 120 V 60 Hz
Maximum pressure	10,000 psi (700 bar)
Safety valve set pressure	7,250 psi (500 bar)
Flow rate - high	5.7 oz/min (160 g/min)
Flow rate - low	3.6 oz/min (100 g/min)
Grease cartridges per battery charge ⁽¹⁾	24 (2 Ah battery) - 40 (4 Ah battery)
Display functions	Battery level gauge, grease meter, grease level gauge
Measuring units	grams, ounces
LED flashlight	Yes, with on/off function
Hose length	44" (1.100 mm)
Shoulder strap	Included
Grease gun weight	7 lb. (3.2 kg)

(1) Low speed - low flow mode.

Number of 14 oz grease cartridges per charge for 4.0 Ah grease gun through grease hose and grease coupler and grease fitting: 23 cartridges.

Number of 14 oz grease cartridges per charge for 4.0 Ah grease gun through grease hose and grease coupler and no grease fitting: 36 cartridges.

Number of 14 oz grease cartridges per charge for 4.0 Ah grease gun at free delivery, with no grease hose, grease coupler or grease fitting: 40 cartridges.

Number of 14 oz grease cartridges per charge may vary depending on several factors, such as the battery charge, working pressure or grease viscosity.

ORDER INFORMATION

Part No.	Description
160 500	Battery Operated Grease Gun - 1 x 2 Ah battery pack. 240 - 220 V / 50 - 60 Hz
160 510	Battery Operated Grease Gun - 1 x 4 Ah battery pack. 240 - 220 V / 50 - 60 Hz

All models include one battery, battery charger, carrying case and one grease gun complete with delivery hose and grease coupler

Accessories

Part No.	Description
169 503	Carrying case
169 012	Grease outlet hose
169 500	Battery charger
169 020	2 Ah - 20 V Lithium-Ion battery pack
169 021	4 Ah - 20 V Lithium-Ion battery pack



Display turns red to warn about operation error.